

PART NUMBER	BOLT SIZE	A ±.005	DI	DO	MAXIMUM LENGTH L	(HF)	(HS)	(M)	(P)
CB5906( )55( )( )	.1640	.328	.1670-.1685	.1840-.1850	.750	.070	.074	.2670	.0280
CB5906( )06( )( )	.1900	.380	.1930-.1945	.2095-.2105	1.000	.080	.084	.3146	.0301
CB5906( )08( )( )	.2500	.505	.2530-.2545	.2696-.2706	1.000	.108	.112	.4244	.0354
CB5906( )10( )( )	.3125	.631	.3155-.3170	.3321-.3331	1.000	.135	.139	.5388	.0407
CB5906( )12( )( )	.3750	.758	.3780-.3795	.3946-.3956	1.000	.162	.166	.6531	.0463

MATERIAL AND FINISH DATA


CODE	MATERIAL	SPEC.	CONDITION	FINISH	SPEC.
C	A-286 CRES	AMS 5525	AS FORMED	PASSIVATE	QQ-P-35
D	A-286 CRES	AMS 5525	ANNEALED	PASSIVATE	QQ-P-35

FIXTURE CODE

CODE	FIXTURE COMPONENTS
NONE	GAGE, ELASTIC, & RETAINER
E	ELASTIC & RETAINER
N	NO FIXTURE

EXAMPLE PART NUMBER

CB5906 C 08 B 200

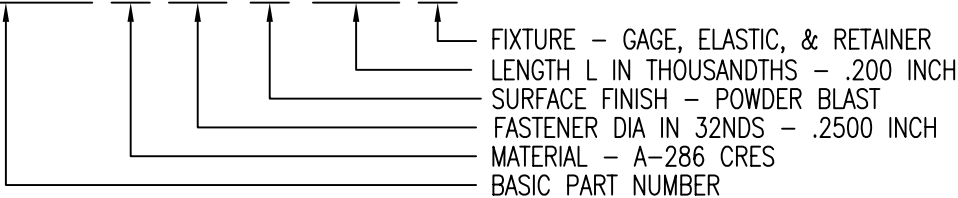

SURFACE FINISH

CODE	TREATMENT
-	NONE
B	POWDER BLAST
C	CAD PLATED
P	EPOXY PRIMER
AC	ALUMINUM COAT

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS SPECIFICALLY PROHIBITED.

**GLICK BOND**

CARSON CITY  
NEVADA 89706

PANDOR

APPROVALS	DATE
DRAWN BSP	17MAR00
CHECKED DAC	21MAR00
RELEASED CGH	21MAR00
REVISED BSP	17MAR00

TITLE			
SLEEVE, BOLT CLEARANCE, 100° TENSION HEAD, ADHESIVE BONDED			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CB5906	2
SCALE	4/1	22FEB99	17MAR00
SHEET 1 OF 1			