




[About LEE](#)
[Products](#)
[Contact Us](#)
[What's New](#)
[Engineering](#)
[Search](#)


Ø .250" Aluminum Plugs for 3000 psi systems



Precision
Micro Hydraulics

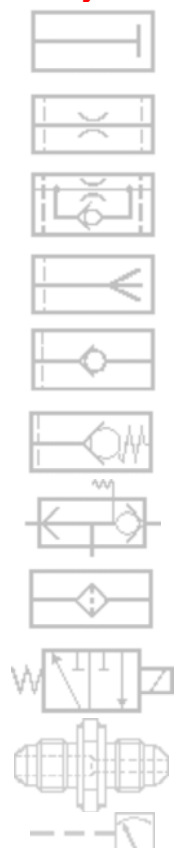

ASK LEE

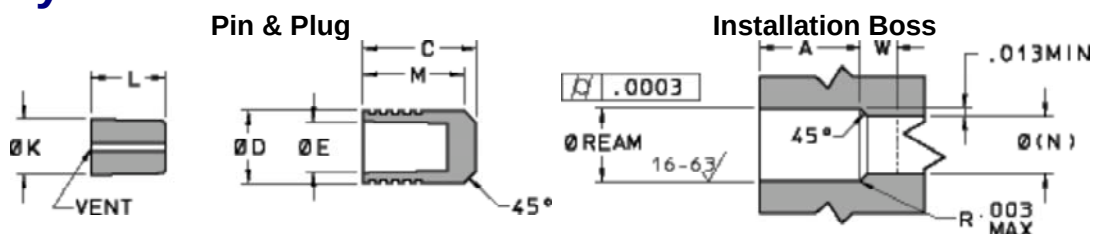

	Short Style	Long Style
Lee Part Number	PLGA2500010A	PLGA2501010A
D Max.	.2500	.2500
D Min.	.2491	.2491
C Nom.	.225	.365
M Nom.	.193	.333
E Nom.	.204	.204
K Nom.	.212	.212
L Nom.	.160	.265
Weight (gr)	.46	.80
Proof Pressure (psi)		
Class 1 fit	8,000	9,000
Class 2 fit	9,000	12,000
Class 3 fit	10,000	14,000
Ream Diameters	inches	inches
Class 1 fit	.2500-.2525	.2500-.2525
Class 2 fit	.2500-.2515	.2500-.2515
Class 3 fit	.2500-.2505	.2500-.2505
A Min.	.212	.352
Ø N Ref.	.218	.218
W Min.	.125	.125
Materials	Pin & Plug: 2024-T4 or T351 Aluminum per QQ-A-225/6	
Finish	Pin: Alodine Yellow per MIL-C-5541 & Wax Plug: Anodize Green per MIL-A-8625 Type II	

For Installation and Extraction Procedures, Tools and Oversize Spare Parts, follow this [link](#)

For more information, please send us your application information via our [ASK LEE](#) service. Or contact our application engineers in the [USA](#) at 1-800-LEE-PLUG or our representatives [around the world](#).

Copyright 09/2002 by The Lee Company, USA

-- [Trademark](#) information --

[LEE Homepage](#)